

PERLEUSE.CH

Circular-graining operations for timepieces




Manual circular-graining unit

- Precision spindle : 0.3 KW
- Speed variator : 0-5000 tr/min
- Vertical working stroke of the spindle : 10 mm
- Spindle return by spring
- Control by cable or connecting rod system, with a ratio of 3:1
- Raised mounting bracket for an ergonomic working position
- Removable tool holder, pliers adapted to the circular-graining : Ø1 to Ø3 mm
- Light ring, with adjustable intensity for a good view of the part
- Height adjustment by rack system : ±50mm
- Integrated electrical cabinet
- Customizable body colour

Option caméra

- 8MP Camera
- 13.3 inch touchscreen on an articulated arm.
- Dedicated HMI for part vision and adjustment of working parameters

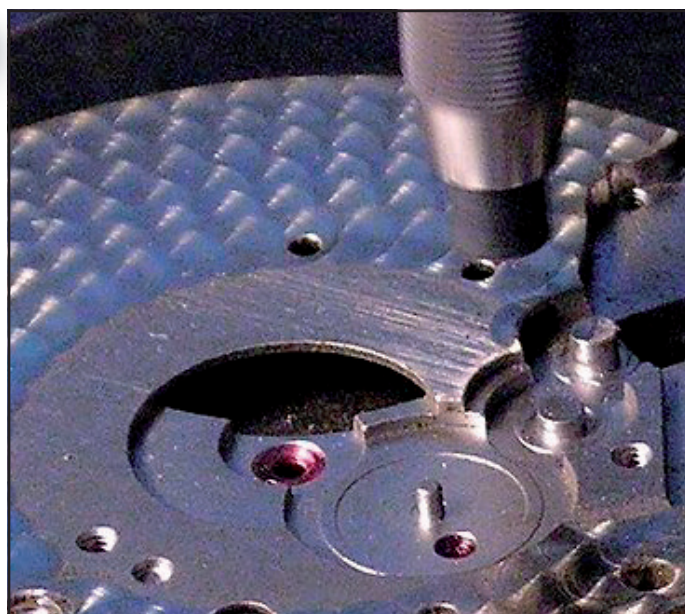

EMISSA SA

Jambe Ducommun, 18 • 2400 Le Locle • Switzerland

Tel: +41 32 933 06 66 • Fax: +41 32 933 06 60 • info@emissa.com

www.emissa.com

E.160105aFR Données non contractuelles